


Five Valves

- 广泛用于石化、电力、医药等行业
- 配合压力表、压力开关、压力变送器使用
- 测量腐蚀、粘稠、易结晶的气体、液体
- Designed for use in chemical and petrochemical power plant and pharmaceutical
- Isolate the sensing element of pressure gauges, pressures switches and pressure transmitters from process liquids
- Suitable for corrosive, viscous and sedimentous gases or liquids

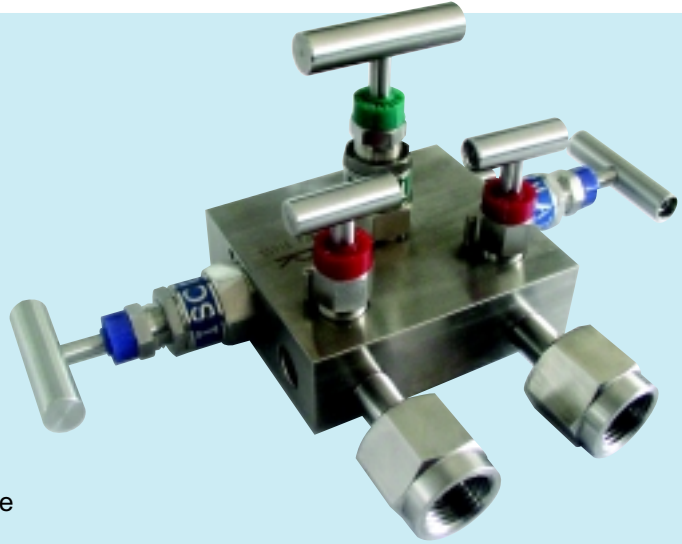

主要技术指标

承压能力：0-24MPa
工作温度：-30-+180
本体材质：316
阀针材质：316
密封材质：PTFE
接口：螺纹 M20*1.5M-M20*1.5F
1/2 " NPT M-1/2 " NPT F
G1/2 " M-G1/2 " F

APECIFICATIONS

Nominal pressure: 0-24MPa
Working temperature: -30-+180
Body material: 316
Needle plug material: 316
Packing material: PTFE
Connection: thread M20*1.5M-M20*1.5F
1/2 " NPT M-1/2 " NPT F
G1/2 " M-G1/2 " F



特殊项

材质：321, 304, 316L
接口：可根据客户要求订制

SPECIAL VERSIONS

Material: 321, 304, 316L
Connection: other on request

外形尺寸图 DIMENSIONS (mm)

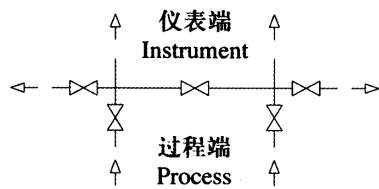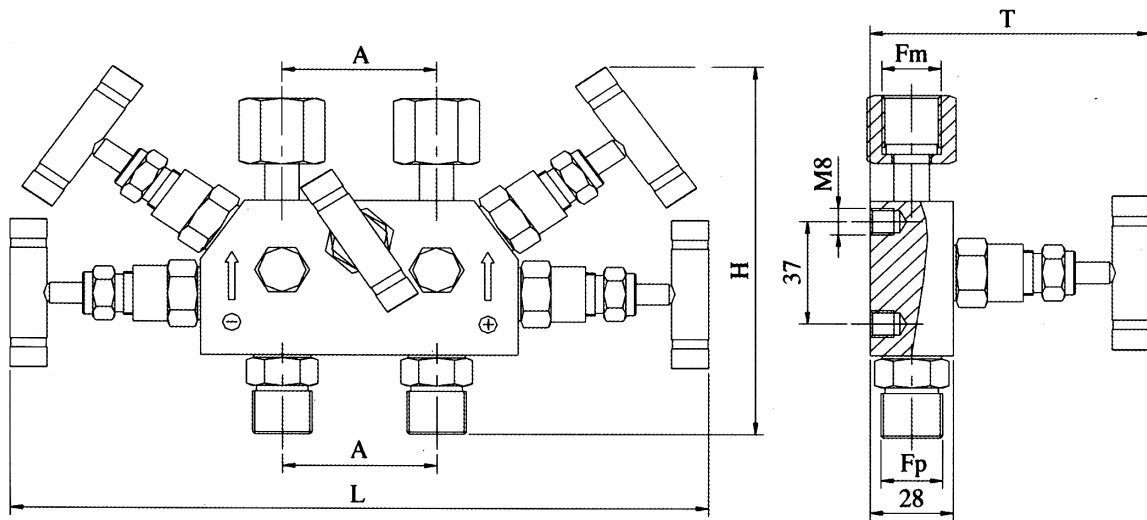

Fp-Fm	A	H	L	T
M20x1.5M - M20x1.5F	37/50/54	120	235/248/252	94...100
1/2 "NPT M - 1/2 "NPT F	37/50/54	120	235/248/252	94...100
G1/2 "M - G1/2 "F	37/50/54	120	235/248/252	94...100